




**Master Power Brakes**  
**Power Booster Conversion Kit**  
**52-72 Full Size Ford**  
**P/N: BM15102-1 & 2, BM15103-1 & 2,**  
**and BM15104-1 & 2**

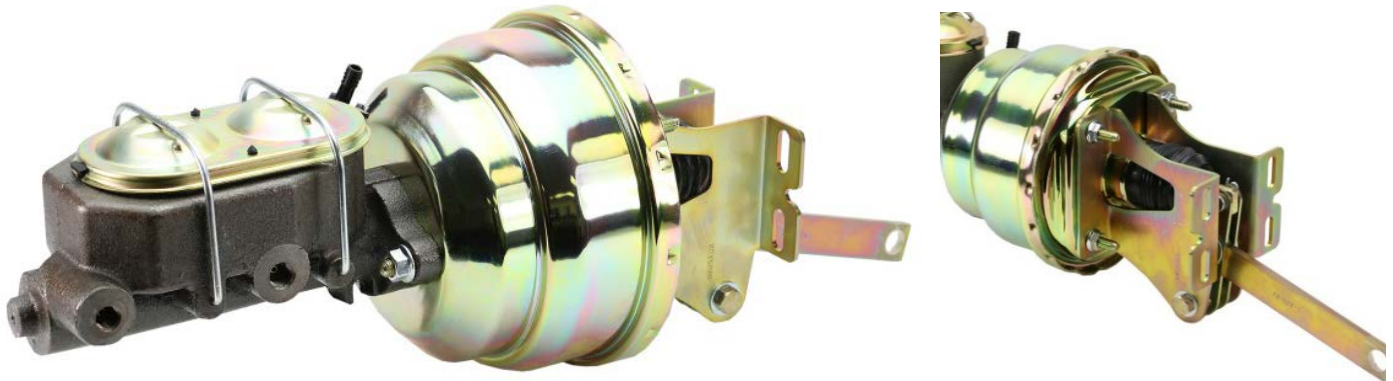

BM15103-2 Shown (8" Dual Diaphragm Booster w/1-1/8" Bore Master Cylinder)

Thanks for your purchase of our Power Brake Conversion Kit for the 52-72 Full-Size Ford applications. This is a simple installation requiring very minimal vehicle modification. Once installed, you will experience that nice easy to operate power pedal that you are looking for. The system does require an engine making 18" of vacuum and is designed to work with either disc/drum or disc/disc. If using 4-wheel drums, give us a call to make sure this system will still work for your vehicle.

**Installation Notes:**

- Please read all instructions before attempting the installation.
- Proper operation of your brakes is essential for your safety and the safety of others. Any brake service should be performed by a professional technician experienced in the installation of brake systems.
- Any installation requiring you to remove a wheel or gain access under the vehicle requires use of jack stands or a lift appropriate to the weight of the vehicle. In all cases, recommended ratings for jack stands should be at least 2-tons. If using a floor jack, be sure to use the appropriate wheel chocks.
- All installations require proper safety procedures and protective eyewear.
- A selection of hand tools sufficient to engage in the installation of these products is assumed and is the responsibility of the installer to have in his/her possession prior to beginning this installation. All installations, which require removal of hydraulic hoses and/or bleeding of the brakes, require appropriate fitting/line wrenches, as well as a safety catch can and protective eyewear. Other than these items, if unique or special tools are required they are listed in the section for that step.
- **ALWAYS CONFIRM WHEEL FITMENT PRIOR TO BEGINNING THE INSTALLATION OF ANY BRAKE SYSTEM!!** Returns will not be accepted for ANY installed part or assembly. Use great care to prevent cosmetic damage when performing wheel fit check!
- Before starting the installation, verify that all parts are included with the brake kit. If items are missing, notify Master Power Brakes immediately.
- Master Power Brakes requires the use of a high quality DOT 3 or DOT 4 brake fluid. Synthetic DOT 4 fluids are acceptable. **ALL WARRANTY IS VOID IF SILICONE DOT 5 FLUID IS USED.**

If you have any questions regarding installation, feel free to contact Master Power Brakes at (888) 351-8781 or through our website at [www.mpbrakes.com](http://www.mpbrakes.com).

Parts List	
Quantity	Description
1	Brake Booster (Size depending on part number)
1	Master Cylinder (1" or 1-1/8" Bore)
1	Booster Bracket Assembly Includes: <ul style="list-style-type: none"> <li>• Bellcrank Pivot Assembly</li> <li>• Push Rod (6.000" Center to Center)</li> </ul> Bracket Assembly Fully Assembled on Booster
1	Booster to Firewall Boot
1	Push Rod (4.875" Center to Center)
1	Vacuum Hose Kit (Includes: 2' Vacuum Hose, 1/2" x 3/8" NPT Bushing, 3/8" NPT 90° Fitting, Syringe Bleeder, 1/2"-20 Plug, & 9/16"-18 Plug)

## Installation:

1. To begin the installation, remove all existing components from the firewall. This would include the master cylinder along with the brake pedal push rod going to the brake pedal.
2. Test fit the booster assembly to the firewall to verify proper clearance between the engine along with any support braces or other accessories within the engine compartment. **NOTE:** Due to manufacturing inconsistencies along with various options for product placement, minor modifications or relocating of components may be necessary.
3. While test fitting the booster, verify the fitment of the brake pedal push rod to the brake pedal. If the pushrod is too long, an additional pushrod is included with the system. To change the pushrod, follow the steps below:
  - a. Remove the unit from the firewall.
  - b. Loosen and remove the lower pivot bolt from the bellcrank assembly and rotate the bellcrank upward on the booster pivot.
  - c. Remove the cotter pin from the center pivot and take the clevis pin from the bellcrank. With the pin removed, swap the pushrod.
  - d. Install the clevis pin and the cotter pin back on the bellcrank.
  - e. Place the lower pivot bolt back in place and tighten. **IMPORTANT:** Do not overtighten this bolt. The bolt should be able to free spin but not have any side-to-side movement.
  - f. Verify proper pedal placement by re-installing the booster on the firewall.
4. Install the pedal push rod boot and plate on the booster mounting bracket. To secure, fold the tabs on the plate onto the brackets as shown in Figure 1a below and fully installed in Figure 1b.



Figure 1a – Folding the Tabs



Figure 1b – Tabs Fully Folded Over

5. To ease installation, the master cylinder can be removed from the booster for an easier install along with bench bleeding. After all changes have been made and the boot plate in place, position the booster on the firewall and bolt in place.
6. Using the provided fittings, install the vacuum tee in the engine. The best source for obtaining vacuum from the engine is to install the fitting in an intake runner in the intake manifold. **NOTE:** The provided fitting is a 3/8"-NPT fitting. For proper operation, find a location that does not require adapting to a smaller fitting and thread size if possible. Connect the provided hose from the fitting to the check valve on the booster.

***IMPORTANT: For proper operation of the brake booster, the engine must produce 18" of vacuum. Anything under 18" vacuum will produce a firm pedal.***

7. With the master cylinder off, it can now be bench bled. There are two methods that can be used for bench bleeding the master cylinder. They are listed below:

***Syringe Bleeding*** (Tools provided in system)


1. Position the master cylinder in a vise clamped by a mounting ear.
2. Pour brake fluid into each chamber of the master cylinder to between  $\frac{1}{4}$  and  $\frac{1}{2}$  full.
3. Using the syringe with the rubber tip attached, fill the syringe using the fluid in the master cylinder chamber. Fill the syringe to about half full.
4. Press the rubber tip to the port on the master cylinder. Holding the syringe firm against the master cylinder, inject the fluid into the master cylinder. The fluid as it flows into the master cylinder will turn from bubbles in the chamber to a steady stream of fluid.
5. When pulling the syringe away from the master cylinder, fluid will drip from the port so have a damp towel handy to wipe off the master cylinder especially if you have painted it.
6. Plug the port with the provided plastic plugs from the Vacuum Hose Kit included with the system.
7. Once a steady stream has been detected, empty the syringe of fluid and then repeat steps 3 through 6 from above for the remaining port.

***Hose Bleeding*** (Tools not provided in system)

1. Position the master cylinder in a vise clamped by a mounting ear.
  2. Pour brake fluid into each chamber of the master cylinder to between  $\frac{1}{4}$  and  $\frac{1}{2}$  full.
  3. Thread the plastic fittings into each port on the master cylinder and attach the hoses to the fittings. Route the hoses into the chambers on the master cylinder and secure. Make sure the hoses are submerged into the fluid.
  4. Using a large Phillips screwdriver inserted into the end of the master cylinder piston, press the piston slowly into the master cylinder and release. Repeat until there is no air coming from the hoses.
  5. Remove the hoses and fittings from the master cylinder. When removing the fittings from the master cylinder, fluid will drip from the port so have a damp towel handy to wipe off the master cylinder especially if you have painted it.
  6. Plug each port with the provided plugs from the Vacuum Hose Kit.
8. Install the master cylinder on the booster using the previously removed nuts. The nuts can be tightened at this time.
  9. With the entire booster/master combo installed, the master cylinder can be plumbed into the vehicle. Figure 2 below shows proper front and rear hookups for the brake lines.

**Rear Brake Port (9/16" – 18)**

**Front Brake Port (1/2" – 20)**

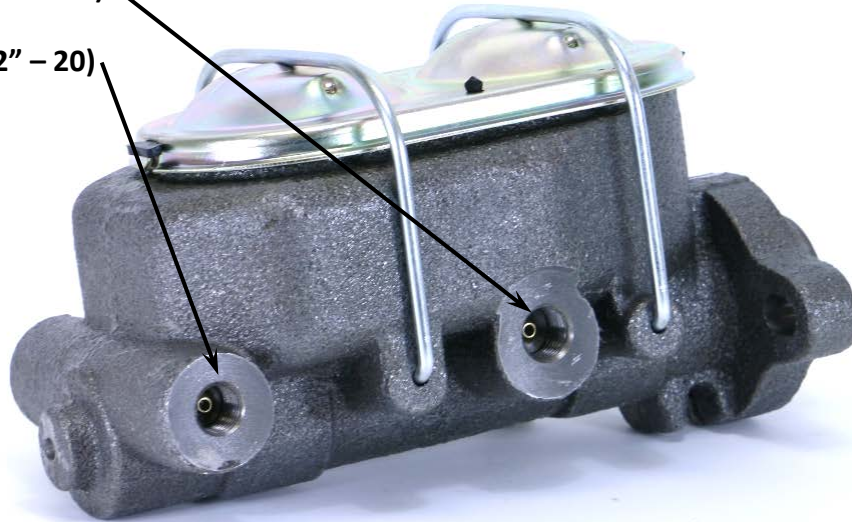

**Figure 2 – Master Cylinder Port Location**

10. Bleed the brake system and the installation is now complete.

If you have any questions or comments, please call Master Power Brakes at (888) 351-8781.