




MASTER POWER BRAKES

110 Crosslake Park Road, Mooresville, NC 28117

Website: www.mpbrakes.com

Technical Support: 888-533-1199

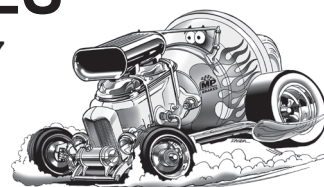

WARNING

Proper operation of your brakes is essential for your safety and the safety of others. Any brake service should be performed **ONLY** by persons experienced in the installation and proper operation of brake systems. It is the responsibility of the person installing the component or kit for the particular application. After installation and before operating your vehicle, be sure to test the function of the brakes under controlled conditions.

→ **DO NOT DRIVE WITH UNTESTED BRAKES!** ←

FOR TECHNICAL ASSISTANCE CALL:

888-533-1199

MONDAY - FRIDAY

8:00 A.M. TO 5:00 P.M. E.S.T.

CHECK ORDER IMMEDIATELY WARRANTY INFORMATION

Take time to read all the literature that came with this kit. Check the provided list of parts against what you received to ensure all parts are present. While this kit was designed to make the process of changing brake parts as simple as possible, **with some kits it may be necessary to make minor changes to your car.**

Read all warranty disclaimers and return policies included in this kit prior to installation.

You have: **5 days** to declare shipping damages
30 days to declare missing or incorrect parts
90 days for exchanges or returns (RA req'd)
1 year before product warranty expires.

No exceptions allowed.

Thank you for your business!



MASTER POWER BRAKES

110 Crosslake Park Road, Mooresville, NC 28117

Website: www.mpbrakes.com Technical Support: 888-533-1199

© 2006 MP Brakes. All rights reserved. Master Power® is a registered trademark of Master Power Brakes, LLC




MC1005 SERIES REMOTE FILL MASTER INSTALLATION INSTRUCTIONS


INCLUDED COMPONENTS

Your MC1005 Series remote fill master cylinder kit will contain the following components:

1. Aluminum master with remote fill fittings
2. Remote plastic reservoir (PZK/MZK) or Aluminum reservoir (PAK/MAK - not shown)
3. Rubber remote reservoir tubing
4. Mounting bracket

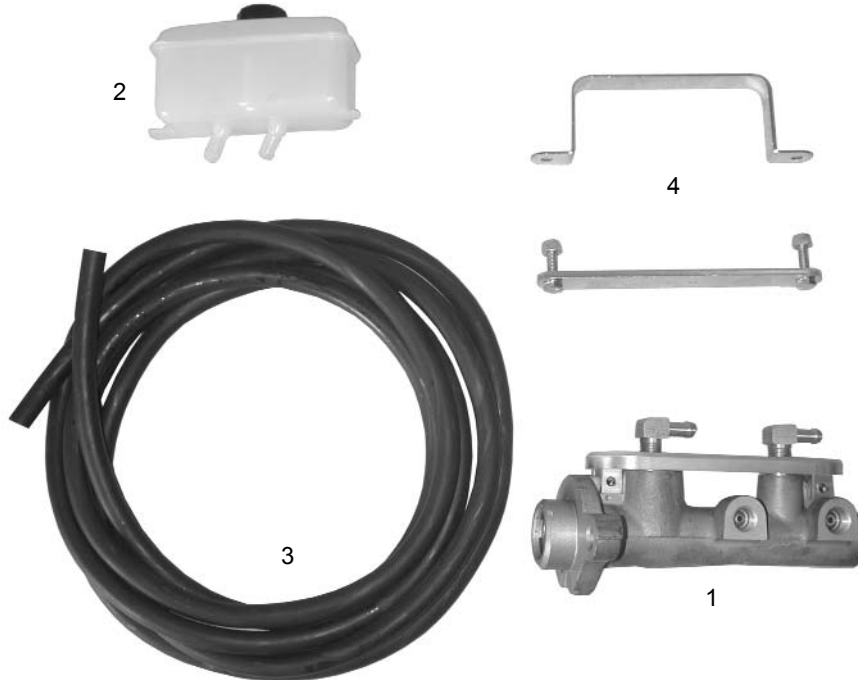

This remote fill master cylinder is designed to work for four wheel disc brakes. The remote fill reservoir must be mounted higher than the master cylinder. Plumb the master cylinder as follows:

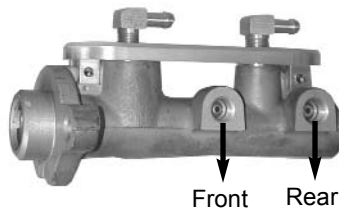

When installing this master under the floor we recommend the use of the following valves for proper pedal feel and function:


For disc front and drum rear: Use a 2 lb residual valve to the front and a 10 lb to the rear.

For disc front and disc rear: Use a 2 lb residual valve to the front and a two pound residual valve to the rear.

We also recommend the use of the correct combination valve to properly balance the system:

Disc/drum: VL3350

Disc/disc: VL3359

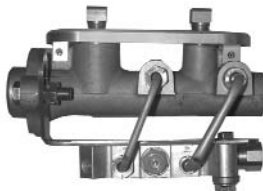

Typical installation of the remote fill master cylinder with a combination valve, combination valve bracket and lines from the master to the valve. Each component must be ordered separately.